



6210-C / 6210A-C

SOFT SERVE FREEZER

Single Flavor, Countertop, Digital Control
A: Pump Feed Model

Most **Compact & Versatile** single flavor countertop model with pump feed option for soft ice cream & frozen yogurt

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Digital control provides access to system settings and displays critical system information

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

Hopper Agitator (Optional)

Maintains product consistency, prevents product separation

Ideal for any business with limited counter space to add ice cream, frozen yogurt, gelato or sorbet. Flexible with digital control and display. Great fit for restaurants, bars, kitchens, convenience stores and delis.



Soft System Start

Slow motor start reduces equipment noise and stress on drive train

Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

Quick Freeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

Self-closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control



Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating



6210-C / 6210A-C

SOFT SERVE FREEZER

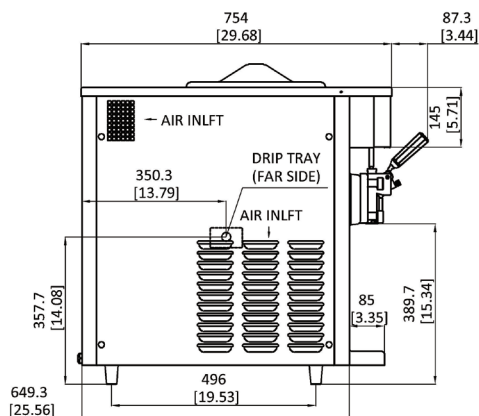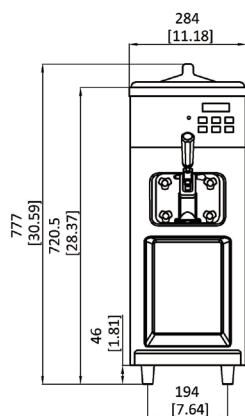

SPECIFICATIONS

Flavors	1
Freezing Cylinders	1 x 1.2 L / 1.3 qt
Mix Hoppers	1 x 8 L (5 L for A)
Output Capacity (80 g)	150 serves/hr
Clearance Requirements	152 mm / 6" on back

Weight

	Kg/lb (Gravity)	Kg/lb (Pump)
Net	93 / 205	98 / 216
Shipping	103 / 227	108 / 238

Dimensions

	Net (mm/in)	Shipping (mm/in)
Width	284 / 11.2	380 / 15.0
Depth	649 / 25.6	810 / 31.9
Height	778 / 30.6	900 / 35.4
Volume	0.28 CBM / 9.78 CBF	

Electrical

	Power (kW)	Total Amps (A)	Fuse (A)
220-240/50/1	1.8	8	13
208-230/60/1	1.8	8	15

FEATURES

Control System	Single, Digital
Refrigerated Hopper	✓
Hopper Agitator (A only)	✓
Temperature Display	✓
Standby Mode	✓
Auto Closing Dispensing Valve	✓
Dispensing Speed Control	✓
Low Mix Indicator Light & Alarm	✓
Low Temperature Protection	✓
Motor Overload Protection	✓
High Pressure Protection	✓
Defrost & Quick Freeze	✓
Soft Start	✓
Direct Drive Pump (A only)	✓

AVAILABLE OPTIONS

None

• Above specifications are subject to change without notice