

6378-C/6378A-C

SOFT SERVE FREEZER

Two Flavor, Floor, Digital Control
A: Pump Feed Model



Most **Powerful** and **Versatile**
Two flavor high capacity floor model
for ice cream, frozen yogurt and
much more

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

Hopper Agitator

Maintains product consistency, prevents product separation

Ideal for high capacity outlets to serve ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options. Small footprint helps save floor space.



Soft System Start

Slow motor start reduces equipment noise and stress on drive train

Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating

Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

Quick Freeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period



Self-closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control



6378-C / 6378A-C

SOFT SERVE FREEZER

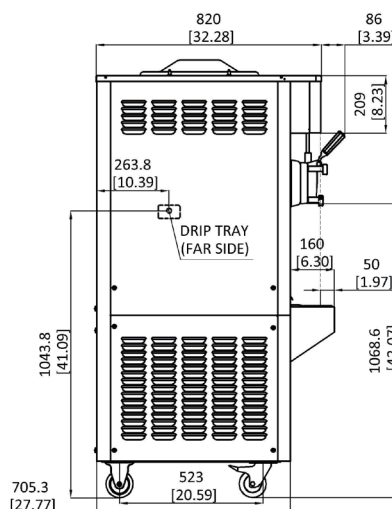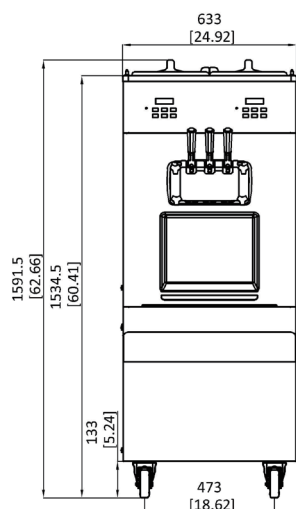

SPECIFICATIONS

Flavors	2 + Twist
Freezing Cylinders	2 x 3.2 L / 3.4 qt
Mix Hoppers	2 x 19 L (13 L for A)
Output Capacity (80 g)	720 serves/hr
Clearance Requirements	152 mm/6" on back

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
Net	240 / 529	256 / 564
Shipping	259 / 571	275 / 606

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	633 / 24.9	810 / 31.9
Depth	705 / 27.8	900 / 35.4
Height	1592 / 62.7	1810 / 71.3
Volume	1.32 CBM / 46.6 CBF	

Electrical	Power (kW)	Total Amps (A)	Fuse (A)
380-415/50/3	4.8	20	25
208-230/60/3	5.2	22	30
208-230/60/1	5.2	24	30

FEATURES

Control Systems	Two, Digital
Refrigerated Hoppers	✓
Hopper Agitators	✓
Temperature Displays	✓
Standby Mode	✓
Auto Closing Dispensing Valves	✓
Dispensing Speed Control	✓
Low Mix Indicator Light & Alarm	✓
Low Temperature Protection	✓
Motor Overload Protection	✓
High Pressure Protection	✓
Defrost & Quick Freeze	✓
Soft Start	✓
Direct Drive Pump (A only)	✓

AVAILABLE OPTIONS

Water Cooled	✓
Top Air Discharge Chute	✓

• Above specifications are subject to change without notice